



AOPEN

Bright Ideas Connected

Digital Engine[®]



Affordable Feature-Rich 4K Player **DE3450X**



Introducing a next-gen media player that is revolutionizing the digital space. The DE3450 series offers UHD performance at an affordable price point. Its fanless commercial-grade ultra slim design offers versatility, while its remote management capabilities are ideal for mission critical applications and other complicated deployments.

The DE3450 Features include:

- + Intel Apollo Lake platform
- + Intel Graphics HD500.
- + 4K 60fps media playback
- + Connectivity via dual Gigabit LAN ports
- + Embedded trusted platform Module (TPM) supporting boot process integrity and data protection
- + Supports auto power recovery (APAR)
- + Ideal for high traffic retail, QSR, corporate, and entertainment environments.



DE3450X

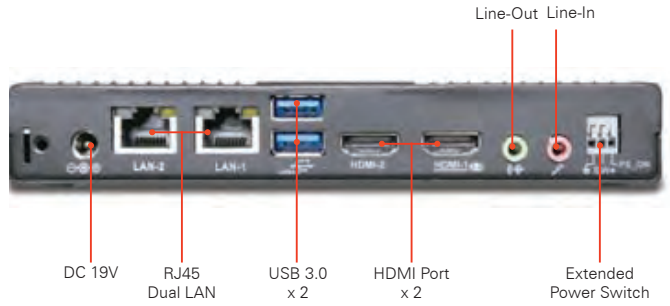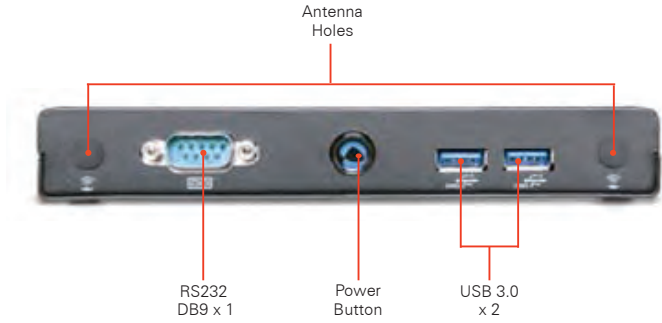

Model name		DE3450X		
Form Factor		Fanless & Non-venting hole design		
Dimension	W x H x D (mm)	166 x 25 x 158 mm		
	W x H x D (inch)	6.54 x 0.98 x 6.22 inch		
Volume		0.65 L		
Single Pack Weight	N.W.	0.8 kg/ 1.76 lb		
	G.W.	1.5 kg/ 3.31 lb		
CPU	Socket	CPU on board		
	Type	Support Intel Apollo lake D Quad Core N3350 (TDP>=6W),		
Chipset		CPU Build-in		
Memory		Dual Channel, DDR3L SO-DIMM x 2, 1866 MHz, up to 8GB		
Graphics	Chip	Intel HD Graphics 500		
Expansion Slot		M.2 2242 x 2 (key B for SSD) M.2 2230 x 1 (key E for WIFI)		
Audio	Type	Realtek HD Audio ALC269Q		
	Channel	Stereo		
LAN		Realtek Gigabit Ethernet RTL8111H x 2 10/100/1000Mbps		
Storage Bay		-		
Front Panel IO	USB 2.0 Port	-		
	USB3.0 Port	x 2		
	Others	RS232 DB9 x 1/ Antenna Hole x 2		
Rear Panel IO	DC Jack	x 1		
	HDMI Port	x 2 (HDMI2.0 x 1 / HDMI1.4b x 1)		
	DisplayPort	-		
	USB 2.0 Port	-		
	USB 3.0 Port	x 2		
	eSATA Port	-		
	RJ45 LAN Port	x 2		
	Legacy RS232 Serial Port (COM Port)	-		
	Audio set	Line-Out	x 1	
		Mic-In	x 1	
	Upgrade for Antenna Port	-		
	Kensington Security Slot	-		
	Others	Extend Power SW x 1		
	On Board I/O		Internal USB2.0 pin head x 2, SATA (FCC type) connector x 1	
Adapter		40W (19V, 2.1A) AC Adapter		
WatchDog Timer		1 ~ 255 SEC./ min		
Input Voltage		AC 100 ~ 240V		
Environment				
MTBF		50,000hrs		
Operating Temperature		0 ~45°C (32 ~ 113°F)		
Storage Temperature		-20 ~ 60°C (-4 ~ 140°F)		
Relative Humidity		95% RH (45°C non-Condensing)		

Supports:



* Memory adjusted from the 1st of May (before 2Gx1)
 * Various stands and mounts are available. Contact your sales representative for more information.
 The specifications depicted may be subject to change without prior notice.
 All trademarks are copyright of their respective owners. © AOPEN Inc.